


# LED间隔柱 LED SPACER SUPPORT

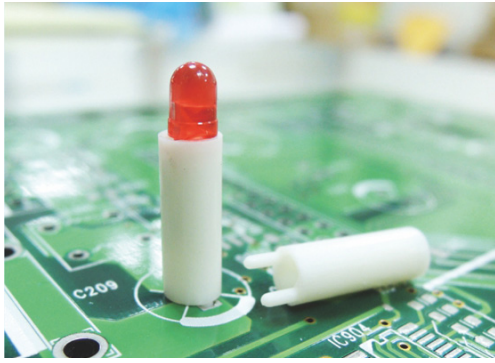

MATERIAL : NYLON 66(UL)




FLAME CLASS : 94V-0,94V-2

COLOR : BLACK,NATURAL

UNIT : mm

用途： 用于保护 $\varnothing 3\text{mm}$  LED立于PC板上，使高度一致，中间隔板设计，接脚不会弯曲、折断、短路，有定位脚，不倾斜。

1

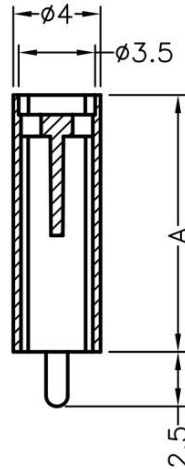


PART NO	A	L	P	PACKAGE
LEDSS-306	8.5	3.0	1	1000
LEDSS-307	6.0	3.0	1	1000
LEDSS-308	11.0	3.0	1	1000
LEDSS-309	12.0	3.0	1	1000
LEDSS-310	15.0	3.0	1	1000
LEDSS-311	17.0	3.0	1	1000
LEDSS-388	23.0	3.0	1	1000
LEDSS-389	5.5	3.0	1	1000
LEDSS-390	7.0	3.0	1	1000
LEDSS-391	9.0	3.0	1	1000
LEDSS-392	10.0	3.0	1	1000
LEDSS-393	13.0	3.0	1	1000
LEDSS-394	14.0	3.0	1	1000

(规格 / 尺寸) 代码说明：

L: LED建议装配规格 P : 装配灯数

# LED间隔柱 LED SPACER SUPPORT

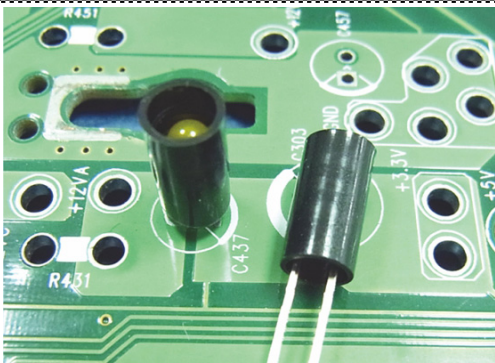



MATERIAL : NYLON 66(UL)

FLAME CLASS : 94V-0,94V-2

COLOR : BLACK,NATURAL

UNIT : mm

用途： 使LED固定于PC板上，使高度一致，不断脚。

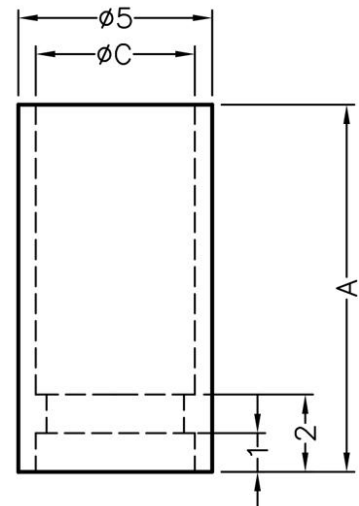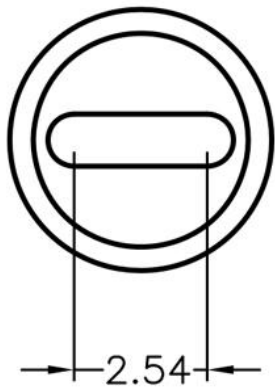

PART NO	A	C	L	P	PACKAGE
LEDSS-312	9.5	$\varnothing 4.1$	3.0	1	1000
LEDSS-314	8.0	$\varnothing 4.1$	3.0	1	1000

(规格 / 尺寸) 代码说明：

L: LED建议装配规格 P : 装配灯数